

# ROSWELL

WAKE-AIR


## S.I. Team Rack Installation Guidelines

Thank you for purchasing the best wakeboard racks in the world. We at Roswell started a revolution in the wakeboard industry back in 1998 and continue to push known boundaries today. We are fully committed to pushing the envelope beyond industry expectations everyday to make your wakeboarding experience more enjoyable. With the input of our team riders in 2006 our goal remains redefining the wakeboard industry day in and day out. We will not be confined to our desk; we are out on the water testing our full line of products to take any unnecessary hassle out of your wake experience. Thank-you again for choosing Roswell and keep an eye out for more dominating technology throughout the season...

Sincerely,

Robert Oswell  
Owner, Designer, Wakeboarder

Tools Needed:  
Allan Wrench Set

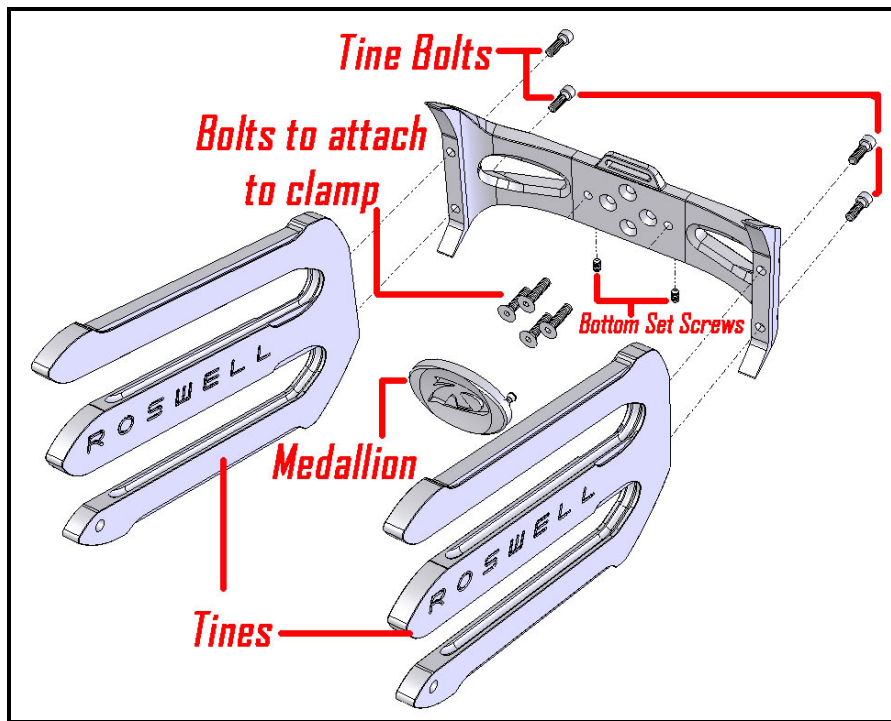

Comments, Concerns, Ideas? Email us at [Roswell@roswellwakeair.com](mailto:Roswell@roswellwakeair.com) or check out our website at [www.roswellwakeair.com](http://www.roswellwakeair.com)

## Pre-Installation

1. Remove the billet medallion from the backing plate by unscrewing the bottom two set screws. You will then be able pull the medallion of the backing plate.
2. Attach the billet tines to the backing plate with the provided socket head cap screws making sure that the bungee clip is the right side up to align with the slot on the backing plate. \*Lock Tite must be used\*

**Note-** If your tines are installed backwards the locking clip will be upside down- To remedy this change the tines to the opposite side.

## Clamp Installation

1. If you are installing the racks with a clamp you will initially need to decide on a place for mounting. We suggest the rear leg of the tower up and out of the driver's line of sight.
2. Tighten the clamp around the rear leg at the desired height with the cluster of tapped holes facing outside the boat. This face should run parallel with edge of the boat
3. *\*If you are installing a swivel with your clamp you will need to mount the clamp low enough on the leg to allow the rack to swivel into the boat with a board in the top slot. Also the swivel's face should run perpendicular to the edge of the boat i.e. it should face the stern.\**

## Board Rack Installation

1. Line up the board rack backing plate with the holes in the clamp. You want the rack to be as close to horizontally level as possible. The tines should be angled slightly upwards
2. Fasten the rack to tower with the 4 bolts provided. Tighten snugly (use a little wakeboard muscle) Use Lock-Tite to **help** prevent the rack from loosening over time.
3. Replace medallion and re-insert the bottom two set screws covering up your bolts giving you an exclusive clean look. Use Lock-Tite

## Board Test

1. Insert board(s): Billet tines should slide between bindings. Please ensure that the board is secure.

1. Top Slot- Bindings facing upwards
  2. Bottom Slot- Bindings facing downwards
2. Pull bungee strap over the edge of both boards and clip strap to the rack.
  3. Enjoy your new found boat space and have a rip for us!

Note- If your board is a little too tight in the billet tines you can use a knife to carefully cut away some of the rubber- Be careful not to remove too much or the board may make contact with the tine and could cause rubbing/scratching.

### **Warning and Disclaimer**

- **Ensure that all set screws, nuts and bolts are in place and secure prior to using your product.**
- **Check the tightness of all bolts/screws/nuts periodically. Even with lock-tite they may loosen over time.**
- **Never travel at high speeds (ie. Towing the boat on a trailer) with wakeboards/skis in the racks. If you own quick release racks or speakers we suggest sliding them off during travel and stowing them safely in the boat or vehicle.**
- **Be cautious when driving your boat on the water or on a trailer if you have board racks. They may narrow your clearance into a garage or slip.**
- **Please feel free to contact us with any questions regarding your new product. A Roswell representative can be reached at (780) 490-7908 or by e-mail at [info@roswellwakeair.com](mailto:info@roswellwakeair.com)**